




High Flow to 12 GPM  
High Head to 48 ft.

**Also Available:**



*Close Coupled*

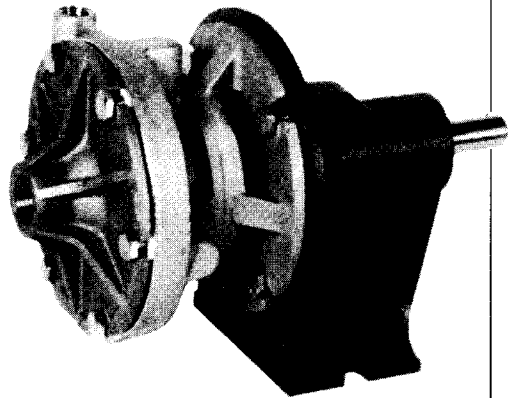

*LT25P  
Frame Mounted*

# Type LT25V



## TECHNICAL INFORMATION CATEGORY

Minimum Flow  
Minimum Immersion  
(measured from end of the suction)  
Maximum Immersion  
(measured from bottom of motor)  
Max. Solid Size  
Max. Temperature  
(contact factory for higher temperatures)  
Maximum Suction Pipe Extension

## LT25VSS

$\frac{1}{2}$  GPM  
4  $\frac{1}{8}$ "  
2  $\frac{7}{8}$ "  
.12"  
300°F  
4'

## MATERIALS OF CONSTRUCTION

**Volute/Column**  
**Impeller**  
**Bushing**  
**Shaft**  
**Fasteners**  
**Gasket**

316 SS  
316 SS  
Graphitar  
316 SS  
316 SS  
Teflon®